


Serie KWG 160

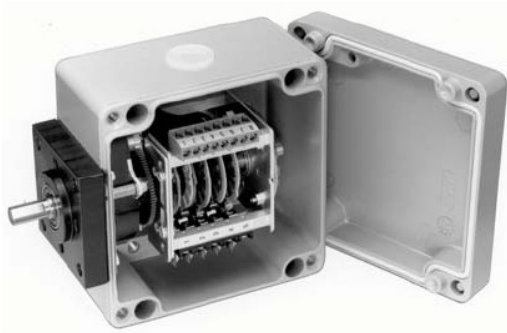

- | | |
|---|----------------------|
| • Programmkanäle (einstellbar)
Program channel (free setting) | 7 / 10 |
| • Eingangsübersetzungen
Input ratios | 1:1...2500 : 1 |
| • Mikroschalter
Snap action switches | 4A 250V AC 1A 60V DC |
| • Schutzart
Protection | IP 64 |


Outline drawing

$\phi d = 9\text{-}h8$

$s = 8,5$

$F = \Rightarrow 40\text{ N } \Downarrow 80\text{ N}$

MS = Montagefläche / Mounting surface

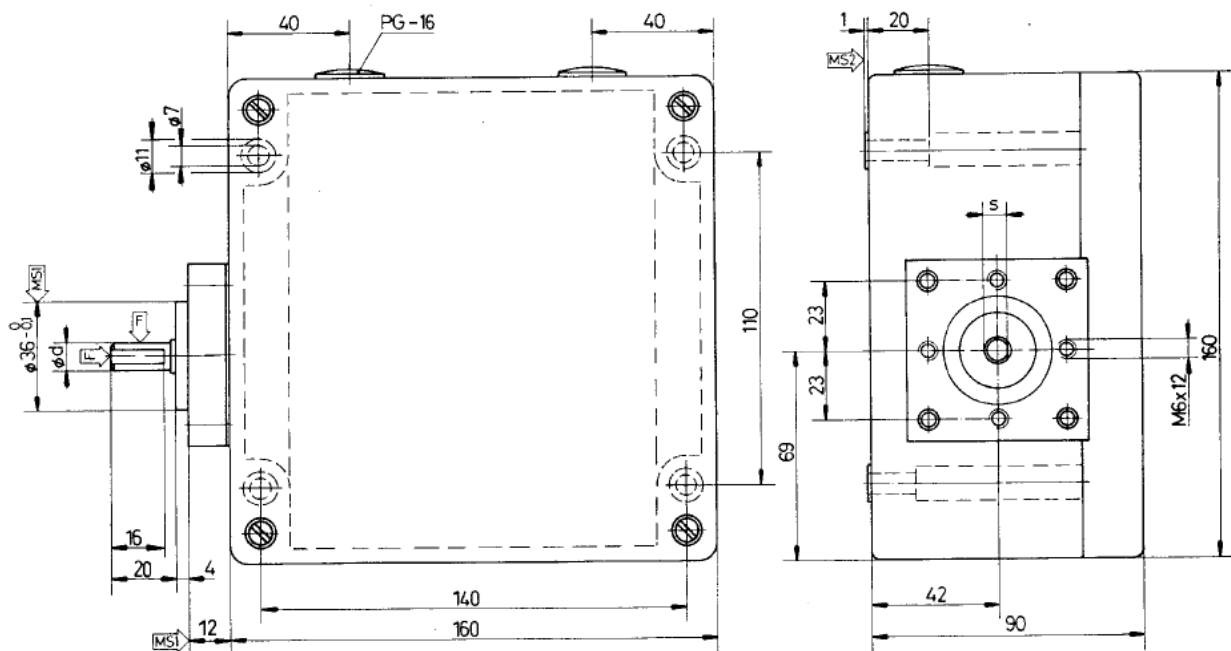

Serie KWG 160

Order key

KWG160

7

U1

L7

Alu-diecasting / Colour (RAL 7001 grey)

Switches:

7 Switches (KS25B4 or KS26B4)

7 = 7 Program channels free setting (NK4201)

Indicator scale S360 (0° ... 360°)

10 Switches (KS25B4 or KS26B4)

10 = 10 Program channels free setting (NK4201)

Indicator scale S360 (0° ... 360°)

Input ratios (Shaft to switches): --> U = one stage; M = more stage

U1 = 1:1

U2 = 1,25:1

U3 = 1,5:1

U4 = 2:1

U5 = 2,6:1

U6 = 2,75:1

U7 = 3,5:1

U8 = 4:1

U9 = 5:1

U10 = 6,5:1

M1 = 12,5:1

M2 = 20:1

M3 = 25:1

M4 = 37,5:1

M5 = 40:1

M6 = 52,5:1

M7 = 75:1

M8 = 100:1

M9 = 200:1

M10 = 300:1

M11 = 420:1

M12 = 600:1

M13 = 750:1

M14 = 1600:1

M15 = 2250:1

M16 = 2500:1

Standard wiring set (included):

7 Switches

L7 = 12 Screw terminal 2,5 mm²

12 Cable 200 mm x 0,34 mm² (AWG 22); incl. 2 x flat connector

5 Cable 70 mm x 0,34 mm² (AWG 22); incl. 2 x flat connector

10 Switches

L10 = 16 Screw terminal 2,5 mm²

16 Cable 200 mm x 0,34 mm² (AWG 22); incl. 2 x flat connector

7 Cable 70 mm x 0,34 mm² (AWG 22); incl. 2 x flat connector